


MODEL 300

Tubular Frame Design

DISC HARROW

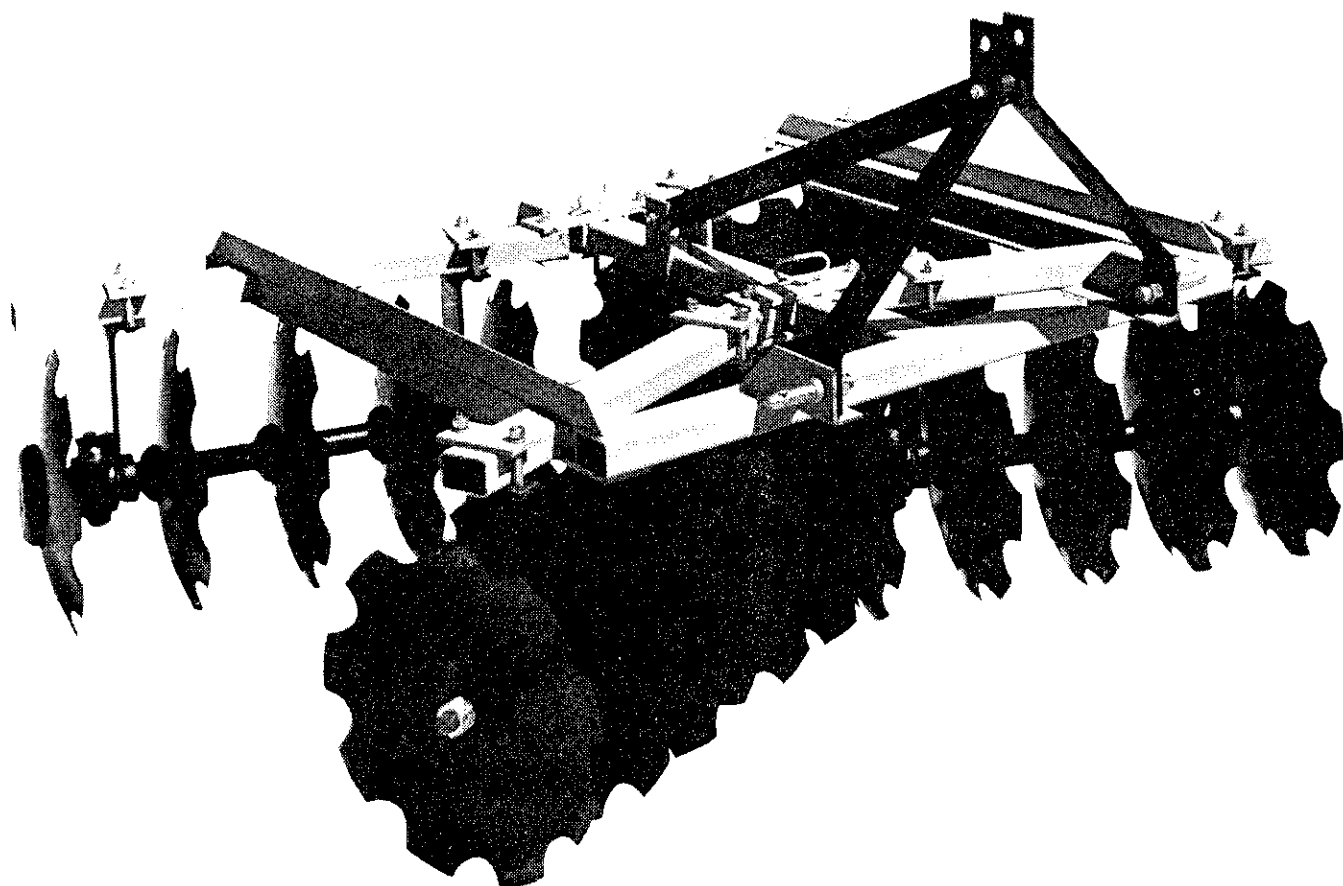

- Three Point Hitch
- Friction Bearings
- Tandem Gangs
- Angle Position Adjustment with Center Pin
- Category I
- Notched Disc Blades
- 7¼" Blade Spacing
- Available in 5½', 6½' or 7½' cutting widths
- Available with 16", 18", or 20" disc blades
- Approximate weights from 510 lbs. to 725 lbs. (depending on width and blade size)
- Optional-Sealed Ball Bearings

DARRELL HARP ENTERPRISES, INC.

P.O. DRAWER 140—PHONE (205)356-4424, 356-4426

RED BAY, ALABAMA 35582

(PRICES AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)